



The NBR LED Bulkhead with dome diffuser are architecturally designed bulkheads. The clean modular design of these vandal resistant bulkheads makes them ideal features to form interesting architectural lighting design elements along walkways, facades and stairs.



NBR LED Bulkhead

Applications: Retail Lighting, Commercial and Housing Developments, Public Lighting, Indoor and Outdoor Applications

Body Housing: Manufactured from LM6 die cast aluminium base and trim ring. Finished in black or white epoxy powder coated.

Diffuser: Injection-moulded, one-piece non- discolouring high impact and thermal resistance UV stabilized with high impact acrylic diffuser smooth interior and exterior opal visor, to SASS specifications.

Gasket: Captive silicone gasket provides seal for outdoor use. Ideal for wet or dust locations.

LED Type: PCB

Screws: Captive stainless-steel screws operate through the diffuser flange for easy location.

Conduit entry: 20mm entry is provided at the back of the bulkhead.


Emergency Mode: 1hr or 3hr Emergency backup available on request.

Ingress Protection: IP65

Photometric Data: Photometric files available on request.

Warranty: 1 Year

Note: Lightning Protection: All electronic products such as light fittings and computers are subject to violent destruction when struck by lightning. An independent lightning protection device, well earthed, needs to be inserted in the supply line before the lighting circuit, where any electronic control gear is used in light fittings. Control gear damaged by lightning is not covered under guarantee.

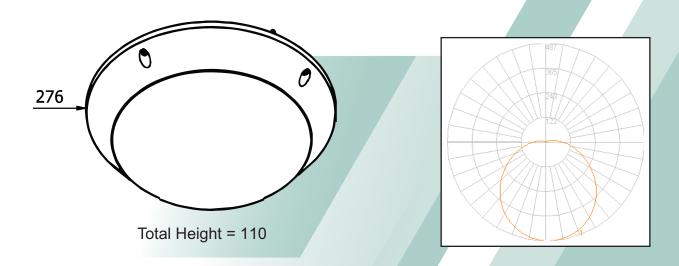

Model Name	NBR LED BULKHEAD	
Rated Wattage(W)	11W	16W
Luminous Efficacy (system)	159lm/W	147lm/W
Luminous Flux (system)	1701lm	2321lm
Colour Rendering Index	>Ra80	>Ra80
Colour Temperature	4000K	
Rated Voltage	220V-240V AC, 50/60Hz	
Ingress Protection Grade	IP65	
Installation	Wall, Ceiling	
Dimensions	ØxH	
	276x110mm	
Weight	1.15kg	