

N50



ZONE 2, ZONE 21, 22 HAZARDOUS AREAS



This luminaire range has a deep drawn stainless-steel body, single piece pressed frame and stainless steel clips.

The 4mm thick lens is clear armor plate glass. Control gear is approved for Zone 2 applications. Available in single and double lamp 18 W, 36 W and 58 W versions.

Explosion Protection

N50/Ex n Ex nA IIC T4 Gc

N50/Ex tD Ex tb IIC 135°C Db

Ingress Protection: IP66

AGENTS

Western Cape
Matelec
rushana@matelec.co.za

KZN
Afrilite
afrilite@mweb.co.za

Eastern Cape
Farad Agencies
farad@iafrica.com

Vaal Triangle
Lighting 2000
drew@lighting2000.co.za

Lighting 2020
nunnsca@gmail.com

PML (Moz.)
baptista.homo@pierlite.co.mz

Purcee Industrial Controls
patrick@purcee.net

Control Gear Tray: The white epoxy powder coated gear tray carries the control gear and lampholders, and is also designed to act as a reflector. Two nylon cords allow the gear tray to be suspended from the body during installation and service.

Body: The single piece deep drawn body may not be drilled on site.

Clip: Double acting. Stainless steel clips.

Lens: 4 mm thick clear tempered plate glass.

Gasket: Extruded silicone one piece gasket.

Lens Frame: Pressed from a single piece sheet without joining welds and with extra wide ends for increased rigidity.

Frame Suspension: The lens frame is suspended from two points along one side of the body to allow the glass frame to swing open during lamp change and servicing.

Control Gear: Electronic control gear to comply with Ex nA requirements. Single and double lamp versions available, with end of lamp life protection. Terminal block is rated 4mm².

Cable entry: 20 mm entry provided for a gland, a special threaded boss can be welded in for positive sealing. Corrosion resistant glands are recommended for use with stainless steel light fittings. Any change of gland on site invalidates the Certification.

Entries: Single entry standard, twin entry a special order.

Emergency mode: Solid state inverter/chargers and Zone 2 application (available as a maintained unit only).

Fixing: 8 mm threaded nut welded into the rear mounting brackets, allow for either a bracket, or pole clamps.


Wire guard is available on request.

NOTE: Please DO NOT drill into or damage the luminaire body.

Stainless Steel Grade: 304

Marine Grade: 316 on special order only

For temperature classifications, refer to Table 1 in the Technical Section of the catalogue.

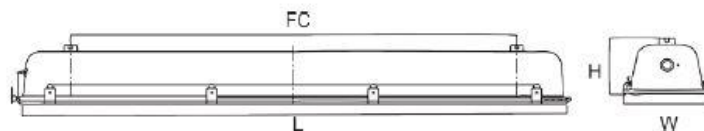

Catalogue Numbers Zone 2	Dimensions (mm)				No. Lamps (W)	No. Clips	Mass (kg)	Catalogue Numbers Zone 21, 22
	L	W	H	FC				
N50 218 W/Ex n	790	219	135	490	2x18 W T8	6	7.3	N50 218 W/Ex tD
N50 236 W/Ex n	1370	219	135	1100	2x36 W T8	8	10.9	N50 236 W/Ex tD
N50 258 W/Ex n	1670	219	135	1195	2x58 W T8	10	11.9	N50 258 W/Ex tD
Emergency								
N50 218 W/Ex n/Em	790	219	135	490	2x18 W T8	6	8.5	
N50 236 W/Ex n/Em	1370	219	135	1100	2x36 W T8	8	11.2	
N50 258 W/Ex n/Em	1670	219	135	1195	2x58 W T8	10	12.2	

BD-PFC-035-F7 Rev. 1 (March 2017)

Nordland reserves the right to change any specification or design without prior notice

Tel +27(0)11 662 - 4300 | Fax +27(0)11 662 - 4319 | sales@nordland.co.za | www.nordland-lighting.com