


NDM Linear



Made in RSA

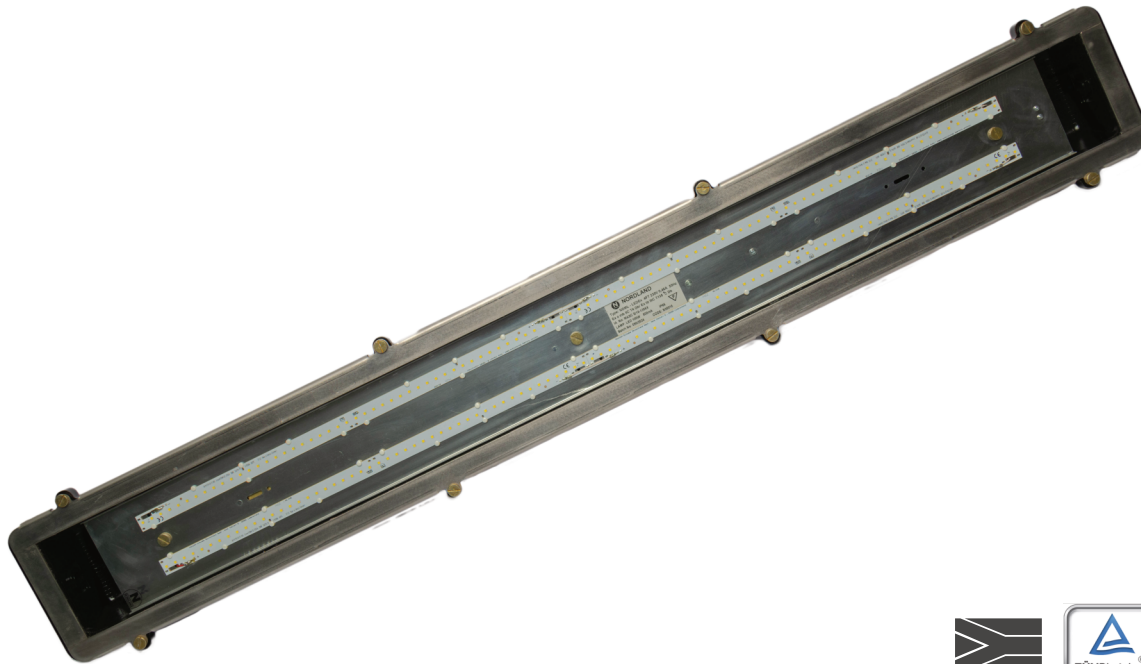

Management System
ISO 9001:2015
www.tuv.com
ID: 910587029



Overview

- **High-Performance Luminaire:**
The NDM is an industrial vapour-proof fitting suitable for demanding environments.
- **Versatile Applications:**
Commonly used in corrosive environments and industrial settings, available in various lengths and wattages.
- **Flexibility in Installation:**
Designed to suit any application with flexibility in mounting heights.
- **Robust Construction**
Made from compression-moulded glass fibre reinforced polyester with a tempered glass lens.
- **Durability:**
Rated IP65 and IK08, the luminaire is robust, can operate in a wide range of ambient temperatures, and includes 2kV surge protection.
- **Energy Efficiency:**
Ensures high energy efficiency and long-lasting performance, optimizing energy consumption and reducing operational costs.

Applications



Mining and
Surface Areas



Oil and Gas



Industrial



Outdoor Areas



Indoor Areas

Linear - Robust - Industrial

PERFORMANCE DATA

Model Name	NDM 2ft 50	NDM 4ft 100
Wattage (W) +- 5% variance	50 W	100 W
Nominal Flux (Lumen)	7590	15180
System Flux (Lumen)	6600	13200
System Efficacy (lm/W)	132 lm/W	132 lm/W

ELECTRICAL OPERATING DATA

Driver Type	Constant Current
Voltage input, Frequency and Power Factor	230VAC +- 10% / 50 or 60Hz / PF > 0.96
Running Current	0.24A @ 50W / 0.48A @ 100W
Allowed Operating Temperature	-20° C to +40° C
Electrical and Thermal Protection	2kV L/N to Earth, 1kV L to N, Thermal Cutout Protection

LED CHARACTERISTICS AND OPTIC DATA

Available Optics	120° Standard
Expected LED Lifespan	>100000 hours @ L70B10 25°C (According to LM-80-08)
Colour Rendering Index (CRI)	>80
Correlated Colour Temperature (CCT)	5000K Standard, 6000K and 4000K available as options on special request
IES Files	Available on request, Professional Lighting Design services available at no cost

PRODUCT MATERIAL AND INSTALLATION

Housing Material and Finish	DMC (Dough mould compound) Fibreglass Reinforced, Black as standard other colours available on special request
Lens and Gasket	4mm Tempered glass lens / Rubber Silicone gasket cemented into groove
Ingress Protection and IK Rating	IP65 / IK08
Mounting and Installation options	Wall, Pole and Ceiling mountings available

Certifications and Standards Compliance

Standards compliance	SANS 60589-1
ISO QMS	9001:2015

Dimensions and Packaging

Model	NDM 2ft 50	NDM 4ft 100
Dimensions (Length x Width x Height) in mm	794 x 176 x 85	1400 x 176 x 85
Weight (Unit / Packaged) in kg	5.8 / 6.0	11.4 / 11.6

Miscellaneous

Contact Nordland	T: 010 442 2809	E: Sales@Nordland.co.za	W: https://Nordland-Lighting.com/
Warranty Details	5 Years (Limited)	T's and C's Available from Nordland	W: https://Nordland-Lighting.com/
Free Services Provided	Lighting Audits	Lighting Designs by Accredited Professionals	Lighting Specification Writing and Tender Detail Assistance

52 Fransen street, Chamdor, Krugersdorp, Johannesburg, South Africa

The information provided in this datasheet is intended for general informational purposes only. Nordland reserves the right to make changes or updates to the specifications, design, and other information contained herein at any time without prior notice. While we strive to ensure the accuracy and completeness of the information provided, we do not guarantee that it is free from errors, omissions, or inaccuracies. Nordland shall not be held liable for any direct, indirect, incidental, or consequential damages arising from the use or reliance on the information contained in this datasheet. It is the responsibility of the user to verify and confirm all information before making any decisions or commitments based on it. For the most up-to-date information, please refer to the latest version of this datasheet or contact Nordland directly.

