

NCP-LS LED Tamper Proof



The **NCP-LS LED Tamper Proof** is a range of enclosed vandal/tamper proof luminaires designed to operate LED strips and are available in 600mm, 1200mm and 1500mm lengths. The luminaire has a unique reflector design which optimizes the light distribution. The heavy-duty luminaire is designed to be used in areas subject to physical abuse with a view to vandalize and destroy. Tamper proof screws require a special tool for opening the luminaire. The **NCP-LS LED Tamper Proof** continues the proud heritage of RAMIKA PROJECTS quality standards.



RAMIKA PROJECTS

NCP-LS LED Tamper Proof

Applications: Suitable for use in Prison Cells, Subways Railway Stations, Magistrates Court Holding Cells, Police Station Holding Cells, Small factories with low mounting heights, or Covered Walkways and Mine Hostels.

Body & Frame: Manufactured from cold rolled sheet metal of minimum thickness 0.8 mm gauge. White epoxy powder coated.

Gear Tray: Manufactured from 0.8 mm gauge cold rolled sheet metal, formed to give the best light distribution.

Diffuser: 1.2 mm thick clear polycarbonate lens, with internal linear prism to limit glare. Sealed into the fabricated frame. The combination is designed for impact strength, and appearance.

Lamp Types: The gear tray is designed to house the LED strips.

Note: Lightning Protection: All electronic products such as light fittings and computers are subject to violent destruction when struck by lightning. An independent lightning protection device, well earthed, needs to be inserted in the supply line before the lighting circuit, where any electronic control gear is used in light fittings. Control gear damaged by lightning is not covered under guarantee.

Screws: Tamper Proof round headed screws are used to secure the frame to the body. A special tool is required to open this luminaire.

Conduit entry: The body has provision for a central 20mm rear entry.


Emergency Mode: Emergency Options available on request.

Night Light: Available on request.

Ingress Protection: IP54 after installation.

Photometric Data: Photometric files available on request.

Warranty: 5 Year

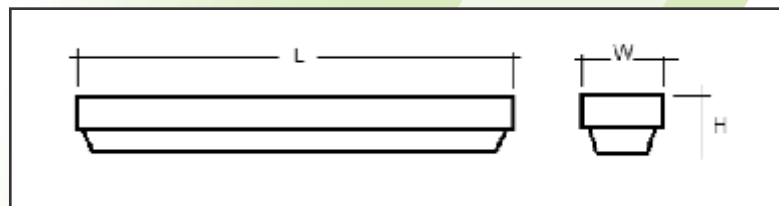

Model Name	NCP-LS LED Tamper Proof					
	2ft (600mm)		4ft (1200mm)		5ft (1500mm)	
Amperage	500mA	350mA	500mA	350mA	500mA	350mA
Rated Wattage(W)	28W	36W	53W	68W	64W	90W
Luminous Efficacy (system)	136.5lm/W	136.5lm/W	136.5lm/W	136.5lm/W	136.5lm/W	136.5lm/W
Luminous Flux (system)	3822lm	4914lm	7235lm	9282lm	8736lm	12285lm
Colour Temperature	4000K					
Colour Rendering Index	>Ra80					
Rated Voltage	220V-240V AC, 50/60Hz					
Ingress Protection Grade	IP54 after installation					
Ambient Temperature	-20°C to +40°C					
Power Factor	>0,96					
Rated Lifetime	50 000 Hr.					
Installation	Wall & Ceiling mounting					
Dimensions	L x W x H (2ft)		L x W x H (4ft)		L x W x H (5ft)	
	740x215x115mm		1340x215x115mm		1640x215x115mm	

Ramika Projects reserves the right to change any specification or design without prior notice.